




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>7</sup> : <b>H04B 7/06</b>	<b>A1</b>	(11) International Publication Number: <b>WO 00/41339</b> (43) International Publication Date: 13 July 2000 (13.07.00)
(21) International Application Number: PCT/FI99/01062 (22) International Filing Date: 21 December 1999 (21.12.99) (30) Priority Data: 982763 21 December 1998 (21.12.98) FI (71) Applicant (for all designated States except US): NOKIA NETWORKS OY [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI). (72) Inventor; and (75) Inventor/Applicant (for US only): KATZ, Marcos [AR/FI]; Aleksanterinkatu 15 A 7, FIN-90100 Oulu (FI). (74) Agent: PATENTTITOIMISTO TEKNOPOLOIS KOLSTER OY; KOLSTER OY AB, Iso Roobertinkatu 23, P.O.Box 148, FIN-00121 Helsinki (FI).		(81) Designated States: AE, AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), DM, EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KR (Utility model), KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i> <i>In English translation (filed in Finnish).</i>

(54) Title: DATA TRANSMISSION METHOD AND RADIO SYSTEM

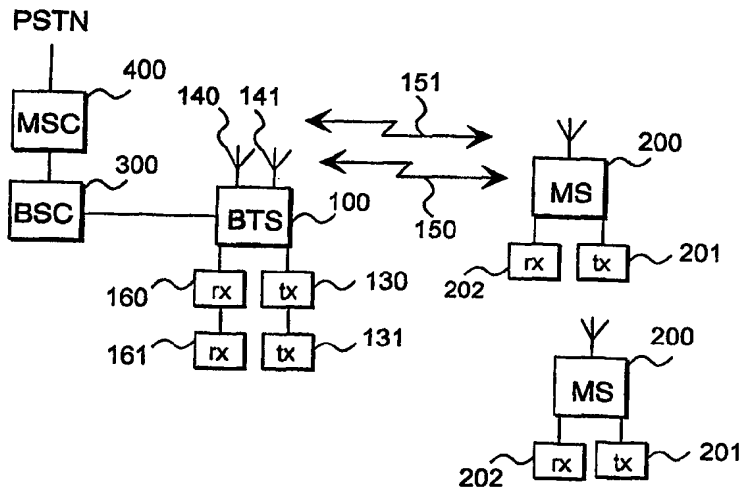

## (57) Abstract

The invention relates to a data transmission method and a radio system comprising at least one subscriber terminal (200) and at least one base station (100) comprising an antenna (140, 141), by means of which the base station transmits signals to the subscriber terminal. The subscriber terminal (200) comprises a measuring means (230) which determines the quality of the signals received by the subscriber terminal by comparing the received signals with at least one signal quality threshold level. When only one signal exceeds the threshold, the subscriber terminal (200) sends to the base station (100), which transmitted the signal that exceeded the threshold, a command to use, when transmitting a signal to said subscriber terminal, the antenna with which the signal that exceeded the threshold was transmitted, or the transmission direction to which the signal that exceeded the threshold was transmitted.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## DATA TRANSMISSION METHOD AND RADIO SYSTEM

### FIELD OF THE INVENTION

The invention relates to a data transmission method used in a radio system comprising a subscriber terminal and at least one base station transmitting signals to the subscriber terminal by means of its antenna.

### BACKGROUND OF THE INVENTION

In transmitting signals, prior art radio systems use various diversity methods to improve the quality of data transmission. Diversity methods include, for instance, orthogonal transmit diversity (OTD), time switching transmit diversity (TSTD) and selective transmit diversity (STD). The above-mentioned diversity methods can be used in future WCDMA systems, for instance. Said methods improve BER performance, for instance, in data transmission. Of the above-mentioned methods, especially the STD method provides the greatest advantages as compared with the OTD and TSTD methods, for instance.

In FDD systems, the STD method can be used in selecting antennas, for instance. In this case, in a radio system, a subscriber terminal, which can be a mobile phone, for instance, selects and advises the base station to select an as optimal antenna as possible for the base station to use in a downlink signal transmission. The selection of antennas is based on measuring the quality of signals transmitted by the base station antennas and comparing the obtained measurement results with each other.

However, the use of STD methods causes load problems in the power amplifiers of the transceiver. The problems are caused because the load of the power amplifiers is not always distributed evenly between the various power amplifiers, and the differences in loads may be relatively big. In a CDMA-type radio system, for instance, a situation may arise in practice where a given transmission branch of a base station is selected to transmit signals to a large number of subscriber terminals which establish simultaneous connections by means of the signals. Such a selection method calls for extensive dynamics of the power amplifier at the transmission branch. Extensive dynamics call for using a high crest coefficient in designing the power amplifiers, which coefficient is determined by the ratio of the maximum output required of the power amplifier and its average output.

Let us assume that the base station comprises a first and a second

transmission antenna which transmit a signal to the same subscriber terminal. Let us further assume that the base station comprises a first power amplifier feeding its signal to the first transmission antenna and a second power amplifier feeding its signal to the second transmission antenna. If the subscriber terminal is advantageously located with respect to the first transmission antenna, for instance, the subscriber terminal receives a signal of at least slightly better quality from the first transmission antenna. In practice, it may well be possible that the signal transmitted by the second antenna is also received as a relatively good-quality signal. If the antenna is selected to transmit a signal to mobile phones, of which there are  $K$  and to each of which the base station power amplifier transmits the signal at  $P$  power, the dynamics of the base station power amplifier must achieve a power level of at least  $KP$ .

Because the selection of antennas is based solely on measuring the absolute quality of the signal, the subscriber terminal sends to the base station a command to use the first transmission antenna. If sufficiently many subscriber terminals command the base station to use the first transmission antenna, it is possible that the nominal loadability of the first power amplifier is exceeded. If the subscriber terminal has had to select the better of two base station antennas, for instance, the subscriber terminal can transmit information on the selection by using one selection bit. In the above-mentioned situation, the value of the selection bit may be '1', for instance, indicating the selection of the first transmission antenna, for instance. The value '0' of the selection bit would then have indicated the selection of the second transmission antenna.

The selection method is, however, not optimal from the point of view of the power amplifier load, since the used method may lead to overload in the power amplifier feeding the selected transmission antenna. The load of the power amplifiers is thus too uneven in some situations. Said problems are at least partly caused by the fact that measuring the signal quality is based on absolute values which does not lead to the best possible solution for the operation of the system.

## BRIEF DESCRIPTION OF THE INVENTION

The object of the invention is thus to implement a method and an apparatus implementing the method in such a manner that the above-mentioned problems can be solved. This object is achieved by a data transmission method as described in the specification, characterized by

determining the quality of the signals received by the subscriber terminal by comparing the received signals with at least one signal quality threshold level, sending to the base station, which transmitted the signal that exceeded the threshold, information on the antennas which transmitted the signals that exceeded the threshold, or information on the transmission direction, from which the signal that exceeded the threshold was received, selecting from the antennas, which transmitted the signal that exceeded the threshold, an antenna or antennas to continue the transmission of the signal to said subscriber terminal, or selecting from the transmission directions, from which the signal that exceeded the threshold was received, a transmission direction or directions, to which to continue the transmission of the signal to said subscriber terminal.

In addition, the object is achieved by a data transmission method as described in the specification, characterized by determining the quality of the signals received by the subscriber terminal by comparing the received signals with at least one signal quality threshold level, and when only one signal exceeds the threshold, sending to the base station which transmitted the signal that exceeded the threshold a command to use, when transmitting a signal to said subscriber terminal, the antenna with which the signal that exceeded the threshold was transmitted, or the transmission direction to which the signal that exceeded the threshold was transmitted.

The invention also relates to a radio system comprising at least one subscriber terminal and at least one base station comprising an antenna with which the base station transmits signals to the subscriber terminal.

The radio system of the invention is characterized in that the subscriber terminal comprises a measuring means which determines the quality of the signals received by the subscriber terminal by comparing the received signals with at least one signal quality threshold level, the subscriber terminal sends to the base station, which transmitted the signal that exceeded the threshold, information on the antennas from which the signal that exceeded the threshold was transmitted, or information on the transmission directions from which the signal that exceeded the threshold was received, the base station comprises a means which selects from the antennas, which transmitted the signals that exceeded the threshold, an antenna or antennas which continue to transmit a signal to said subscriber terminal, or the means selects from the transmission directions of the signals, which exceeded the

threshold, a transmission direction or directions to which the base station continues to transmit a signal.

In addition, the radio system of the invention is characterized in that the subscriber terminal comprises a measuring means which determines the quality of the signals received by the subscriber terminal by comparing the received signal with at least one signal quality threshold level, and when only one signal exceeds the threshold, the subscriber terminal sends to the base station, which transmitted the signal that exceeded the threshold, a command to use, when transmitting a signal to said subscriber terminal, the antenna with which the base station transmitted the signal that exceeded the threshold, or the transmission direction to which the signal that exceeded the threshold was transmitted.

The preferred embodiments of the invention are disclosed in the dependent claims.

The invention is based on the idea that the subscriber terminal measures the signals transmitted by the base station by comparing them to a threshold level, and the transmission antenna, transmission direction or beam used by the base station is selected case by case either in the subscriber terminal or base station.

The data transmission method and radio system of the invention provide several advantages. With the method of the invention, the load of the amplifiers in the base station of the radio system can continuously be distributed as evenly as possible between each amplifier. Since the load remains even, the dynamics of the amplifiers need not be as extensive as in amplifiers used in prior art radio systems, thus facilitating the design of amplifiers.

The method minimizes the unevenness of load between power amplifiers by letting the base station select the transmission antenna of a downlink transmission, when necessary. If the base station uses adaptive antennas, the method of the invention makes it possible to select a transmission direction which causes as little interference as possible to the other signals in the radio network.

In addition, the method makes it possible to implement a flexibly operating radio system. In a receiver, which is a subscriber terminal, of the radio system of the invention, the received signals are categorized by means of threshold levels into different signal groups. Using several thresholds makes

it possible to allocate channels more flexibly to receivers. In addition, using thresholds improves the reliability of the antenna selection. The solution of the invention is relatively easy to implement by altering signalling, for instance.

#### BRIEF DESCRIPTION OF THE DRAWINGS

5           The invention will now be described in greater detail by means of preferred embodiments with reference to the attached drawings, in which  
Figure 1 shows a radio system of the invention,  
Figure 2 shows the structure of a base station of the radio system,  
Figure 3 shows a more detailed description of the base station,  
10           Figure 4 shows the structure of a subscriber terminal in the radio system,  
Figure 5 illustrates the purpose of use of the threshold levels,  
Figure 6 illustrates the selection process used in the radio system.

#### DETAILED DESCRIPTION OF THE INVENTION

15           Figure 1 shows a radio system comprising a base station 100, subscriber terminals 200, a base station controller 300 and a mobile switching centre 400. The subscriber terminals 200 can be mobile phones, for instance. The base station comprises transmitters 130, 131 and receivers 160, 161. In addition, the base station comprises antennas 140, 141 with which the base  
20           station transmits and receives signals. The base station transmits to a subscriber terminal and receives from a subscriber terminal a signal 150 by means of its antenna 140. In addition, the base station transmits to a subscriber terminal and receives from a subscriber terminal a signal 151 by means of its antenna 141. The figure shows that the subscriber terminal  
25           comprises a transmitter 201 and a receiver 202. The subscriber terminal can receive signals transmitted from the various antennas of the base station. The signals containing the same information received by the subscriber terminal can also be transmitted by different base stations.

          Figure 2 shows in greater detail the structure of the base station  
30           100 in the radio system of the invention. The base station comprises antennas 140, 141 acting in practice as transceiver antennas. In addition, the base station comprises an amplifier 111, a radio frequency part 112, a demodulator 113 and a decoder 114 on the receiving side. The base station can use antenna diversity, for instance, in transmission. The antennas must be located  
35           far enough from each other when using antenna diversity. The distance of the

antennas can be at least 10 to 20fold, for instance, in relation to the used wavelength.

The antennas can also be adaptive antennas, for instance, in which case they allow the use of angle diversity in transmitting signals. The base station forms beams with the adaptive antennas to use in transmitting signals. The adaptive antennas are located at a distance of at most half of the used wavelength, for instance, in relation to each other.

The radio-frequency signal received by the base station is forwarded from the antenna to the amplifier 111 which amplifies the level of the received signal. The amplified signal is forwarded to the radio frequency part 112 which transfers the signal to an intermediate frequency. The radio frequency part 112 is connected to the demodulator 113 which returns the broadband signal to a narrowband data signal, if the signal in question is a CDMA signal. The invention is, however, not in any way restricted to the CDMA system, and the system can, for instance, be a TDMA system or a radio system operating according to another principle.

The data signal is forwarded from the demodulator 112 to the decoder 114 which decodes the data signal in a suitable manner. The signal coming in to the decoder 114 can be convolution-coded, for instance. The operation of the decoder 114 can be based on the Viterbi algorithm, for instance. Typically, the decoder 114 decrypts and deinterleaves the signal.

On the transmission side, the base station comprises an amplifier 121, a coder 122, a modulator 123 and a radio frequency part 124. The coder 122 receives a signal and, after coding it, transmits the signal to the modulator 123. The coder 122 can use convolution coding, for instance. In addition, the coder 122 encrypts the signal, for instance. The coder 122 also interleaves the signal bits or bit groups. In practice, the modulator 123 can act as a symbol modulator, for instance. If the transceiver is of CDMA type, the signal received from the modulator 123 is pseudo-random noise-coded into a broadband spread-spectrum signal. After this, the spread-spectrum signal is converted into radio frequency according to prior art in the radio frequency part 124. The radio-frequency signal is forwarded to the amplifier 121 which amplifies the signal. The amplified signal is transmitted via the antenna to the radio path. The base station also comprises a means 102 which controls the operation of the above-mentioned base station blocks, and a means 103 which stores data



on the load status of the amplifiers, for instance. The means 103 can be implemented with a memory circuit, for instance.

In practice, the receiving side of the base station comprises several receiver branches. Correspondingly, the transmitting side of the base station may comprise several transmitter branches and each transmitter branch can be connected to its own antenna, for instance. In addition, the signals going through each transmitter branch are typically forwarded to different amplifiers for amplification. Figure 3 illustrates the above-mentioned base station which has several amplifiers acting as power amplifiers on the transmitting side.

Figure 4 shows in greater detail the structure of the subscriber terminal used in the radio system of the invention. The subscriber terminal comprises an antenna 240, an amplifier 211, a radio frequency part 212, a demodulator 213, a decoder 214, an amplifier 221, a coder 222, a modulator 223 and a radio frequency part 224, an amplifier 221 and a control means 202. In principle, the above-mentioned subscriber terminal parts function in the same way as the parts corresponding to said parts in the base station. In addition, the subscriber terminal comprises a measuring means 230 which measures the quality of the signals received by the subscriber terminal. Measuring the quality can be based on measuring signal strength, amplitude-to-power ratio, S/N ratio, signal energy or signal bit error ratio, for instance. The measuring means can measure the signal quality continuously or periodically.

The subscriber terminal can simultaneously receive signals from either the same base station or from several base stations. The measuring means 230 in the subscriber terminal measures the received signals. The purpose for measuring the signal quality is to select the most optimal antenna for the radio system to transmit the signal to the subscriber terminal. The transmission direction or the beam used in transmission can also be selected on the basis of the signal quality measurement. The base station can use the load situation of an amplifier, for instance, as a selection criterion. Another purpose is that the final selection decision on the transmission antenna, transmission direction and/or amplifier is made either in the subscriber terminal or the base station.

The measuring means 230 compares the measured signal with one or more threshold levels. Figure 5 shows a diagram illustrating the purpose of use of the threshold levels used in the subscriber terminal. Let us assume that

the subscriber terminal receives a signal 150 transmitted by an antenna 140, and a signal 151 transmitted by an antenna 141. There is at least one threshold level for the received signals, with which the signal quality is compared. The threshold levels can be pre-set at fixed values, for instance. In measuring the received signal, the placement of the signal being measured is examined in relation to the threshold level. The signal being measured can be either below or above the threshold level. In some special cases, the signal being measured may be at exactly the threshold level. In the radio system of the invention, a method known as the B-STD diversity method (Balanced Selective Transmit Algorithm) is used to help select the transmission antenna and transmission direction of the base station. The signals of different antennas or beams can be distinguished from each other in the subscriber terminal on the basis of different codes, their pilot signal or training sequence code.

Let us assume that in Figure 5, the subscriber terminal receives a signal S1 and S2. Let us further assume that the base station antenna 140 transmits the signal S1 and the antenna 141 transmits the signal S2. When the quality of both signals exceeds the pre-set level  $Th$ , the subscriber terminal sends information on the quality of the signals to the base station, and consequently, either the antenna 140 which transmitted the signal S1 or the antenna 141 which transmitted the signal S2 can be selected as the final transmission antenna. In the above situation, both antennas 140, 141 can be selected as final transmission antennas. The same principle can also be used when selecting the beam or the transmission direction. In the situation described above, the base station makes the final decision on the transmission antenna, transmission beam or transmission direction on the basis of the information sent by the subscriber terminal. In practice, the means 102 in the base station makes the decision.

If the signal S1 exceeds the threshold, but the signal S2 is below it, the subscriber terminal sends information on the quality of the signals to the base station. After receiving the information, the base station continues to transmit the signal S1 through the antenna 140. If the signal S1 is below the threshold, but the signal S2 exceeds it, the subscriber terminal sends information on the quality of the signals to the base station, and having received it, the base station continues to transmit the signal S2 through

antenna 140. In the above-mentioned situations, the final decision on the transmission antenna, for instance, is already made in the subscriber terminal.

If both signals S1, S2 are below the threshold level, the subscriber terminal sends information on the quality of the signals to the base station which can, for instance, stop transmitting both signals. Therefore, the setting of the threshold level has a high significance. The threshold level can be set to a level, for instance, that when the signal received by the subscriber terminal is below it, the base station antenna which transmitted the signal will not be taken into consideration in the selection process. However, when the quality of the signal received by the subscriber terminal is above the threshold level, the base station antenna which transmitted the signal is considered in the selection process. In the case described above, the subscriber terminal can send the information on the signal quality or antenna selection in one bit. If the subscriber terminal receives signals with M antennas, M bits are required to send all above-mentioned information to the base station.

Figure 5 shows that on the basis of the quality measurement made by the subscriber terminal, preliminary candidates are selected for the transmission antenna, transmission direction or transmission beam of the base station. The final selection is made on the basis of the preliminary selection, and the final selection can be made either in the subscriber terminal or the base station depending on the case.

Figure 6 illustrates the selection process. Figure 6 shows areas 250 and 252 which are ellipse-shaped. The areas 250 and 252 overlap slightly. The overlapping area 251, which is common to the areas 250, 252, is marked with lines. When the area 251 common to the areas 250 and 252 is subtracted from the area 250, an area A remains. When the area common to the areas 250 and 252 is subtracted from the area 252, an area B remains. Let us assume that the antenna 140 transmits a signal S1 and the antenna 141 a signal S2. When the signals received by the subscriber terminal fulfil the quality condition ( $S_1 < Th$ ,  $S_2 > Th$ ) in the area A, the antenna 141 is selected. When the signals received by the subscriber terminal fulfil the condition ( $S_1 > Th$ ,  $S_2 < Th$ ) in the area B, the antenna 140 is selected. In the two previous cases, the subscriber terminal makes the final decision on the transmission antenna used by the base station.

If the signals received by the subscriber terminal are in the area 251, the subscriber terminal sends information to the base station that both

signals exceed the threshold. After receiving the information, the base station can, if necessary, select the antenna 140 and/or 141. In this situation, the base station makes the final selection on the transmission antenna. In addition to the antenna, it is also possible to select and make a decision on the transmission direction or the beam the base station uses for transmission. When the subscriber terminal transfers the decision selection to the base station, it simultaneously informs the base station of suitable antenna candidates. When the final decision on the selection is made in the base station, the means 102 in the base station selects the transmission beam causing the least interference. When the final decision on the selection is made in the subscriber terminal, the means 202 in the subscriber terminal selects the transmission beam causing the least interference to be the beam for the base station.

When the base station has been given the right to decide on the diversity antenna selection, the base station can make the decision on the transmission antenna on the basis of the load in the amplifier that feeds the antenna. The decision can, for instance, be based on the load of the network or amplifier at the moment on hand, or on a short-time or long-time load of the amplifier. The means 102 in the base station preferably selects the amplifier with the lowest load to feed the selected transmission antenna. This way, the load distribution of the amplifiers remains as even as possible all the time.

The actual load distribution of the amplifiers can be continuously estimated by various means. The means 102 can keep a record of the selections made during a longer period of time. In addition, the means 102 can keep a record of the current and short-term selections. The estimation can easily be done by means of two counters. The counter keeping track of the longer-term selections, can, for instance, calculate an average power for each amplifier. The counter keeping track of the short-term selections can instead monitor the maximum loads, for instance. The latter counter can, for instance, keep a record of the load situation of a time slot being transmitted at a given time. If several counters are used, the incidence probabilities of various load situations can be calculated by different statistical methods.

The load situation data can be utilized when updating the utilization rate data of the amplifiers. The data being updated can be weighted taking into consideration the data transmission rate used in transmission, because the data transmission rate is comparable with the required transmission power.

In practice this means that when transmitting a signal burst at a basic rate, the counter is incremented by one unit, for instance. When a burst is transmitted at  $q$  times the basic rate, the counter is incremented by one  $q$  unit.

Because the data transmission method is based on using a closed  
5 loop, the benefit derived from the use of the method is slightly reduced when the subscriber terminal moves at a high speed. When the radio system has detected that the rate of movement of the subscriber terminal exceeds a predefined limit rate, the base station can send to the subscriber terminal a command, on the basis of which the subscriber terminal stops transmitting the  
10 antenna selection bits to the base station. The radio system can utilize another diversity method for the downlink direction during the time that the subscriber terminal moves at a high speed. If the subscriber terminal can measure its own speed, the subscriber terminal can send information on a suitable transmission antenna to the base station. The selection of an antenna transmitting in the  
15 downlink direction can also be based on a combined selection in which the decision on the antenna is made on the basis of the decisions made by the subscriber terminal and the base station.

If there are  $M$  antennas, for instance, to select from, the amount of antenna selection information sent by the subscriber terminal depends on the  
20 capacity reserved for the transmission of said information at a given time. If the data field in the signal frame is large enough, information on the best antennas and their order of priority can be sent to the base station. It can be generalized that the more transmission antennas are used in the downlink direction, the more probable it is that the most optimal transmission antenna is  
25 selected. On the other hand, the subscriber terminal must then have enough capacity to transmit several selection bits to the base station.

A subscriber terminal acting as a receiver uses one or more threshold levels, the application of which enables the division and grouping of the signals in received channels. By means of the division, the downlink  
30 channels can be divided into different groups, such as 'good', 'average' and 'poor'.

The threshold or thresholds are set in such a manner that they divide the operating area as appropriately as possible so that the different channel spaces can be distinguished. When using only one threshold, special  
35 attention should be paid to selecting the threshold, because the channels are then divided relatively roughly. If the threshold is set too low, antenna selection

can be made on the basis of a channel having a high attenuation, which is not advisable. If the threshold is set too high, even good-quality channels may be rejected during the division process. Power control commands sent earlier can also be taken into account when setting the threshold.

5           If several channels are acceptable to the subscriber terminal for downlink transmission, the subscriber terminal lets the base station select the most suitable transmission antenna. The selection is based on the load of the power amplifiers in the base station. In the above situation, the base station can balance the load situation of the base stations within its own capability.

10           If signals, which when received are of 'poor' quality, are transmitted to the subscriber terminal on two different channels, the information on the quality of the channels can be sent to the base station in two bits by a signalling combination of '11', for instance. Using signalling, the subscriber terminal informs the base station that, in principle, none of the measured  
15 downlink channels are good for transmission, and consequently the transmission of said signals can be interrupted. Transmission interruption can be used when transmitting data in packets, for instance. When using real-time transmission and when all signals received by the subscriber terminal are below the threshold level, the antenna which transmitted the best signal is  
20 selected to continue transmitting the signal.

          If the base station is sending data or non-real-time data, for instance, the base station can, if necessary, interrupt the transmission until better channel conditions are again available. This way, it is possible to avoid a situation in which the base station tries in vain to establish a connection by  
25 increasing its transmission power, thus increasing interference to other signals in the radio system. It is thus possible to prevent the occurrence of common channel interference, for instance, by means of the method. In real-time transmission, in which the signalling flow should be continuous, a base station can transmit a signal to the subscriber terminal through several antennas.

30           Even though the invention has been explained in the above with reference to an example in accordance with the accompanying drawings, it is obvious that the invention is not restricted to it but can be modified in many ways within the scope of the inventive idea disclosed in the attached claims.

## CLAIMS

1. A data transmission method used in a radio system comprising a subscriber terminal (200) and at least one base station (100) which transmits signals to the subscriber terminal by means of its antenna (140, 141),

5 **characterized by**

determining the quality of the signals received by the subscriber terminal by comparing the received signals with at least one signal quality threshold level,

10 sending to the base station (100), which transmitted the signal that exceeded the threshold, information on the antennas, which transmitted the signals that exceeded the threshold, or on the transmission directions from which the signal that exceeded the threshold was received,

15 selecting from the antennas, which transmitted the signal that exceeded the threshold, an antenna or antennas to continue the transmission of the signal to said subscriber terminal (200), or selecting from the transmission directions, from which the signal that exceeded the threshold was received, a transmission direction or directions, to which to continue the transmission of the signal to said subscriber terminal.

20 2. A data transmission method used in a radio system comprising a subscriber terminal (200) and at least one base station (100) which transmits signals to the subscriber terminal by means of its antenna (140, 141), **characterized by**

25 determining the quality of the signals received by the subscriber terminal (200) by comparing the received signals with at least one signal quality threshold level, and

30 when only one signal exceeds the threshold, sending to the base station (100), which transmitted the signal that exceeded the threshold, a command to use, when transmitting a signal to said subscriber terminal, the antenna with which the signal that exceeded the threshold was transmitted, or the transmission direction to which the signal that exceeded the threshold was transmitted.

3. A method as claimed in claim 1, **characterized** in that when the quality of several signals is within the acceptable levels, information on the quality of the signals is sent to the base station (100), and the base

station can, on the basis of the information, decide which antenna or direction it will use to continue transmitting the signal.

4. A method as claimed in claim 1, **characterized** in that the signals transmitted by the base stations are amplified by amplifiers (121),  
5 and in the method, the antenna which is connected to the amplifier with the lowest load is selected as the transmission antenna.

5. A method as claimed in claim 1, **characterized** in that the signals transmitted by the base stations are amplified by amplifiers (121) before transmission, and in the method, the selection decision is made on the  
10 basis of the load situation of the amplifiers.

6. A method as claimed in claim 1 or 2, **characterized** in that if the quality of the signal received by the subscriber terminal (200) is below the lowest acceptable quality level, information on the quality of the above-mentioned signal is sent to the base station which, after receiving the  
15 information, interrupts the transmission of the poor-quality signal.

7. A method as claimed in claim 1, **characterized** in that the signal is transmitted to the subscriber terminal (200) by means of beams, and the final decision on the transmission antenna, transmission direction or beam to be used by the base station is made in the base station (100).  
20

8. A method as claimed in claim 2, **characterized** in that the signal is transmitted to the subscriber terminal (200) by means of beams, and the final decision on the transmission antenna, transmission direction or beam to be used by the base station is made in the subscriber terminal (200).  
25

9. A method as claimed in claim 1, **characterized** in that the transmission beam of the base station causing the least interference is selected and the selection decision is made in the base station (100).  
30

10. A method as claimed in claim 2, **characterized** in that the transmission beam of the base station causing the least interference is selected and the selection decision is made in the subscriber terminal (200).  
35

11. A radio system comprising at least one subscriber terminal (200) and at least one base station (100) comprising an antenna (140, 141) by means of which the base station transmits signals to the subscriber terminal, **characterized** in that

the subscriber terminal comprises a measuring means (230) which  
35 determines the quality of the signals received by the subscriber terminal by comparing the received signals with at least one signal quality threshold level,



the subscriber terminal sends to the base station, which transmitted the signal that exceeded the threshold, information on the antennas by which the signal that exceeded the threshold was transmitted, or information on the transmission directions from which the signal that exceeded the threshold was received,

the base station (100) comprises a means (102) which selects from the antennas (140, 141), which transmitted the signals that exceeded the threshold, an antenna or antennas which continue to transmit the signal to said subscriber terminal (200), or the means (102) selects from the transmission directions of the signals, which exceeded the threshold, a transmission direction or directions to which the base station continues to transmit the signal.

12. A radio system comprising at least one subscriber terminal (200) and at least one base station (100) comprising an antenna (140, 141) by means of which the base station transmits signals to the subscriber terminal, **characterized** in that

the subscriber terminal (200) comprises a measuring means (230) which determines the quality of the signals received by the subscriber terminal by comparing the received signals with at least one signal quality threshold level, and

when only one signal exceeds the threshold, the subscriber terminal (200) sends to the base station (100), which transmitted the signal that exceeded the threshold, a command to use, when transmitting a signal to said subscriber terminal, the antenna with which the signal that exceeded the threshold was transmitted, or the transmission direction to which the signal that exceeded the threshold was transmitted.

13. A radio system as claimed in claim 11, **characterized** in that when the quality of several signals is within the acceptable levels, the subscriber terminal (200) sends to the base station information, on the basis of which the base station can decide which antenna (140, 141) or direction the base station will use to continue transmitting the signal.

14. A radio system as claimed in claim 11, **characterized** in that the base station comprises amplifiers (121) which amplify the signals before their transmission, and the means (102) selects as the transmission antenna of the base station the antenna or antennas which are connected to the amplifier with the smallest load.

15. A radio system as claimed in claim 11, **characterized** in that the base station comprises amplifiers (121) which amplify the signals before their transmission, and the means (102) makes the selection decision on the basis of the load situation of the amplifiers (121).

5           16. A radio system as claimed in claim 11 or 12, **characterized** in that if the quality of the signal received by the subscriber terminal is below the lowest acceptable quality level, the subscriber terminal (200) sends information on the quality of the above-mentioned signal to the base station which, after receiving the information, stops transmitting the  
10 signal with the antenna by which the signal that was below the threshold was transmitted.

17. A radio system as claimed in claim 11, **characterized** in that the base station (100) transmits the signal to the subscriber terminal (200) by means of beams, and the final decision on the transmission antenna,  
15 transmission direction or beam to be used in the base station is made in the base station (100).

18. A radio system as claimed in claim 12, **characterized** in that the base station (100) transmits the signal to the subscriber terminal (200) by means of beams, and the final decision on the transmission antenna,  
20 transmission direction or beam to be used in the base station (100) is made in the subscriber terminal (200).

19. A radio system as claimed in claim 11, **characterized** in that the base station comprises a means (102) which selects as the transmission beam of the base station the transmission beam causing the  
25 least interference.

20. A radio system as claimed in claim 12, **characterized** in that the subscriber terminal comprises a means (202) which selects as the transmission beam of the base station the transmission beam causing the least interference.

1/3

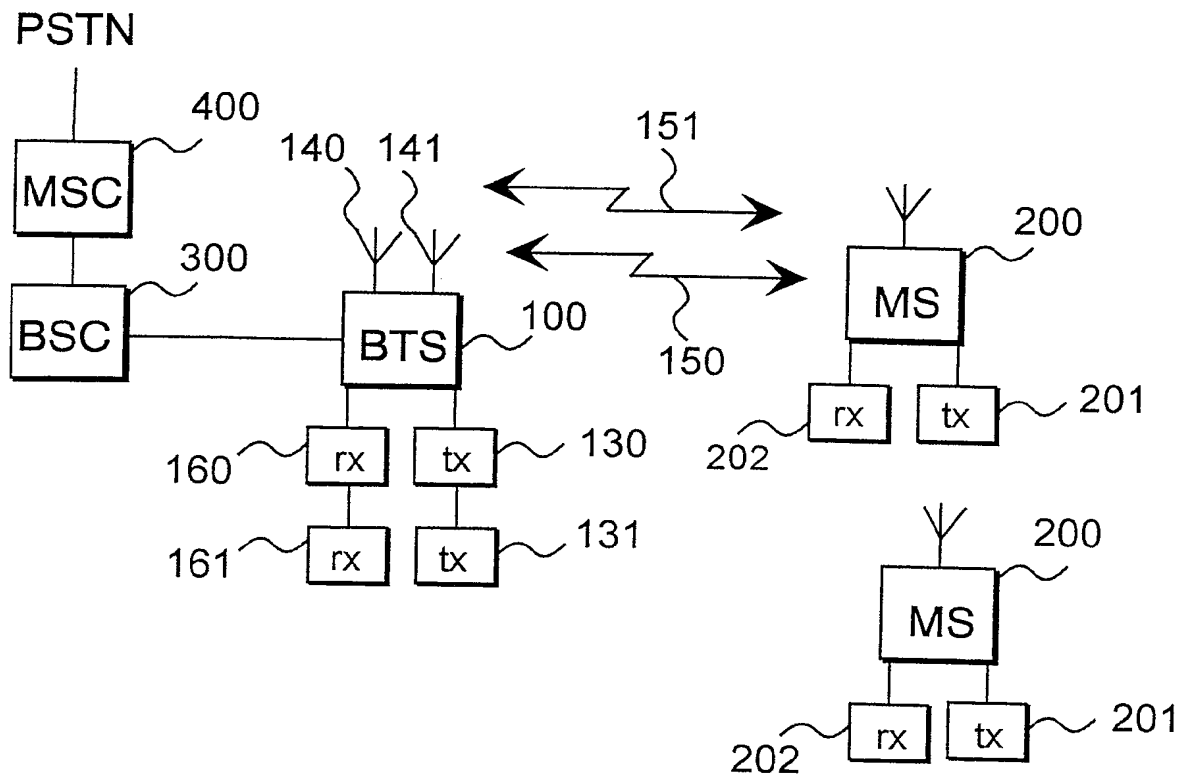


Fig. 1

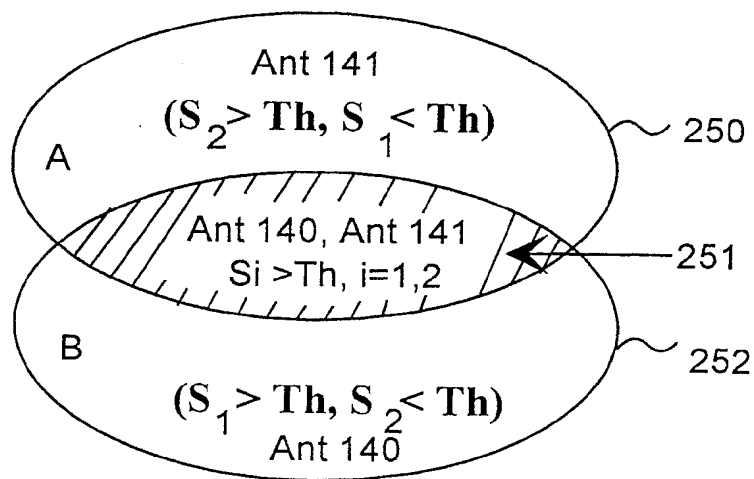


Fig. 5

2/3

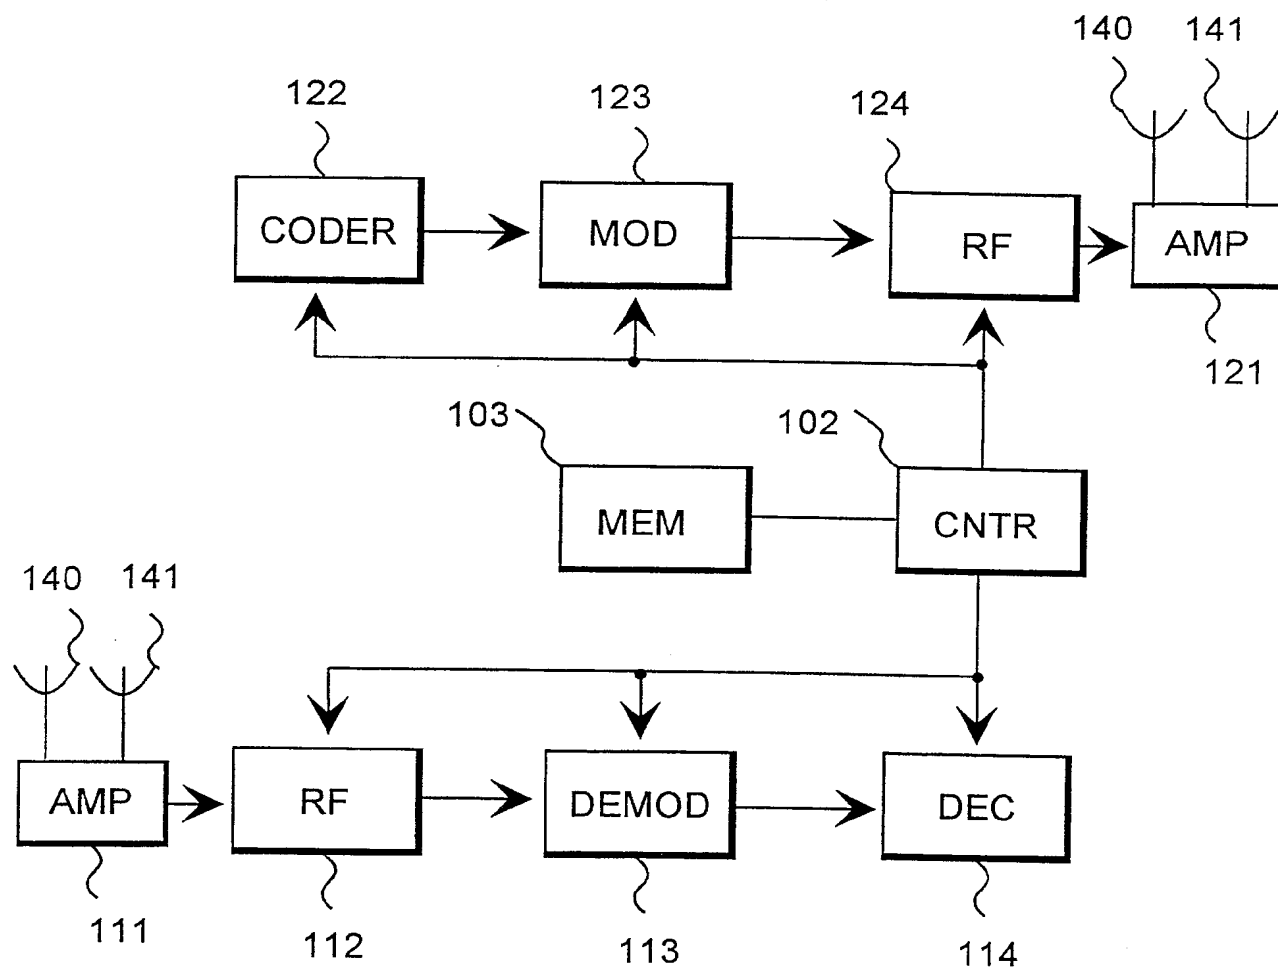


Fig. 2

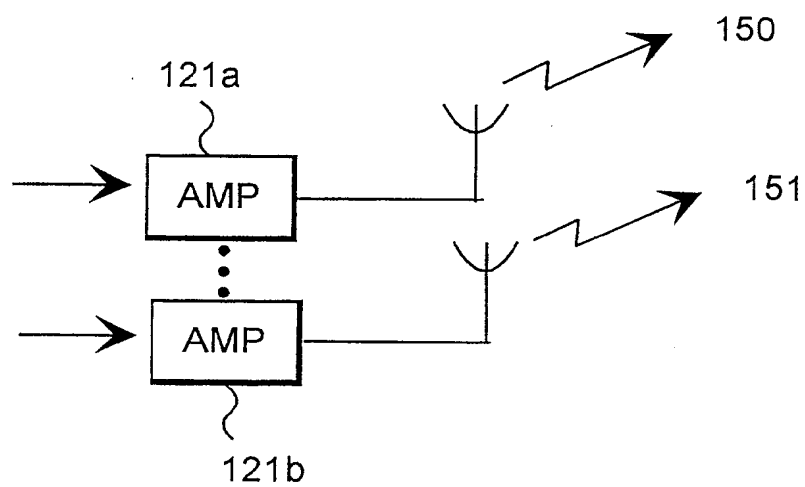


Fig. 3

3/3

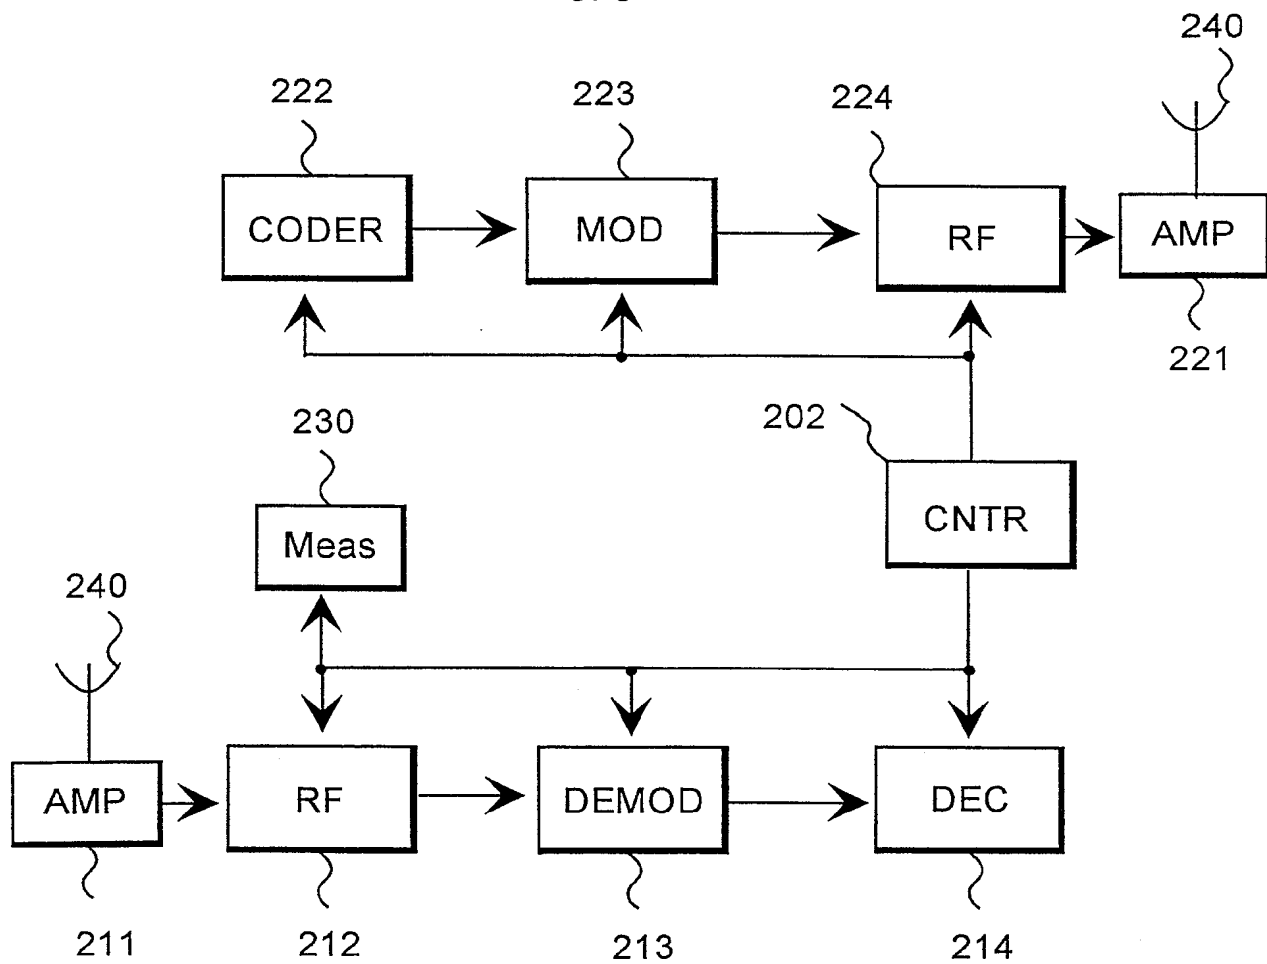


Fig. 4

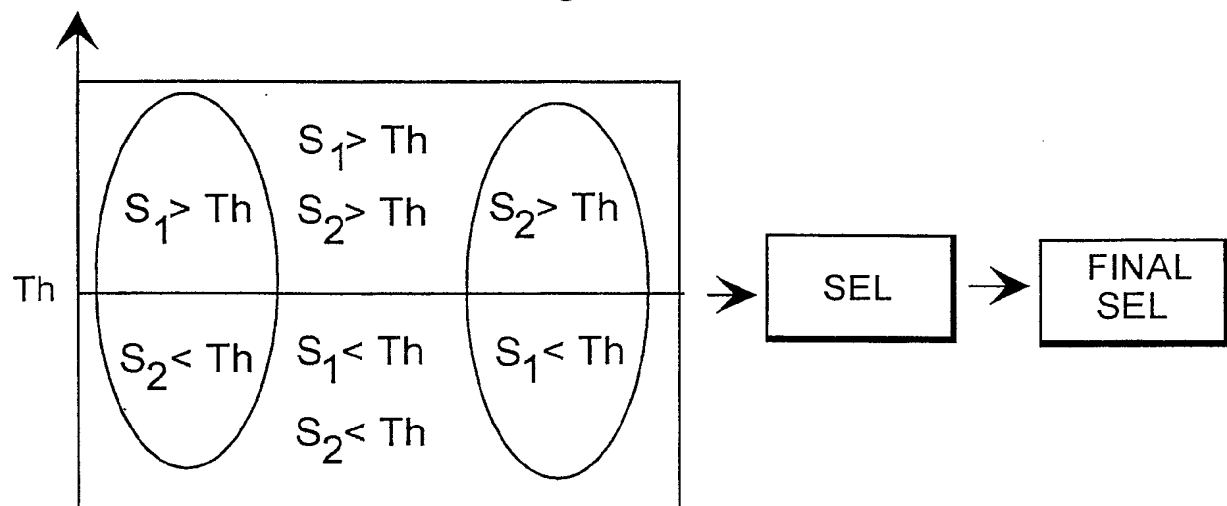


Fig. 6

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 99/01062

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04B 7/06

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5095535 A (T.A. FREEBURG), 10 March 1992 (10.03.92), column 8, line 43 - column 9, line 7, figures 4,5, claims --	1,2,11,12
X	US 5455962 A (M.D. KOTZIN), 3 October 1995 (03.10.95), column 5, line 50 - column 6, line 10, claims --	1,2,11,12
A	WO 9819401 A1 (NORTHERN TELECOM LIMITED), 7 May 1998 (07.05.98), abstract --	1,2,11,12
A	EP 0696113 A2 (ASCOM BUSINESS SYSTEMS AG), 7 February 1996 (07.02.96), abstract --	1,2,11,12

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

8 June 2000

Date of mailing of the international search report

9 JUN 2000

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Fredrik Blomqvist/AE

Telephone No. +46 8 782 25 00

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 99/01062

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5530926 A (W.J. ROZANSKI), 25 June 1996 (25.06.96), figure 7, abstract  -- -----	1,2,11,12

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/FI 99/01062

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5095535 A	10/03/92	AT 122512 T AU 615305 B AU 3607489 A CA 1327836 A CN 1023177 B CN 1039690 A DE 68922536 D,T DK 370389 A EP 0352787 A,B ES 2072876 T IL 90392 A JP 2079628 A JP 2838216 B KR 9707603 B MX 165383 B	15/05/95 26/09/91 01/02/90 15/03/94 15/12/93 14/02/90 18/01/96 29/01/90 31/01/90 01/08/95 13/05/93 20/03/90 16/12/98 13/05/97 06/11/92
US 5455962 A	03/10/95	NONE	
WO 9819401 A1	07/05/98	CA 2188845 A CA 2219096 A CA 2219228 A CN 1211359 A EP 0870371 A EP 0870372 A WO 9819402 A	25/04/98 25/04/98 25/04/98 17/03/99 14/10/98 14/10/98 07/05/98
EP 0696113 A2	07/02/96	NONE	
US 5530926 A	25/06/96	NONE	